

COTTOCEMENTO/

 CERAMICHE
coem



LIGHT GREY
EFFETTO
CEMENTO/

Light Grey 75,5x75,5 - 30"x30"
Naturale/Rettificato



A close-up photograph of large, light beige rectangular tiles. In the top left corner, a wooden tray holds a stack of white linens and a framed artwork. The tiles have a subtle, natural texture and are laid in a standard grid pattern.

BEIGE CALDO E NATURALE/

Beige 75,5x75,5 - 30"x30"
Naturale/Rettificato



COTTOCEMENTO / gres GL

LIGHT GREY/




BEIGE/



DARK GREY/



BROWN/

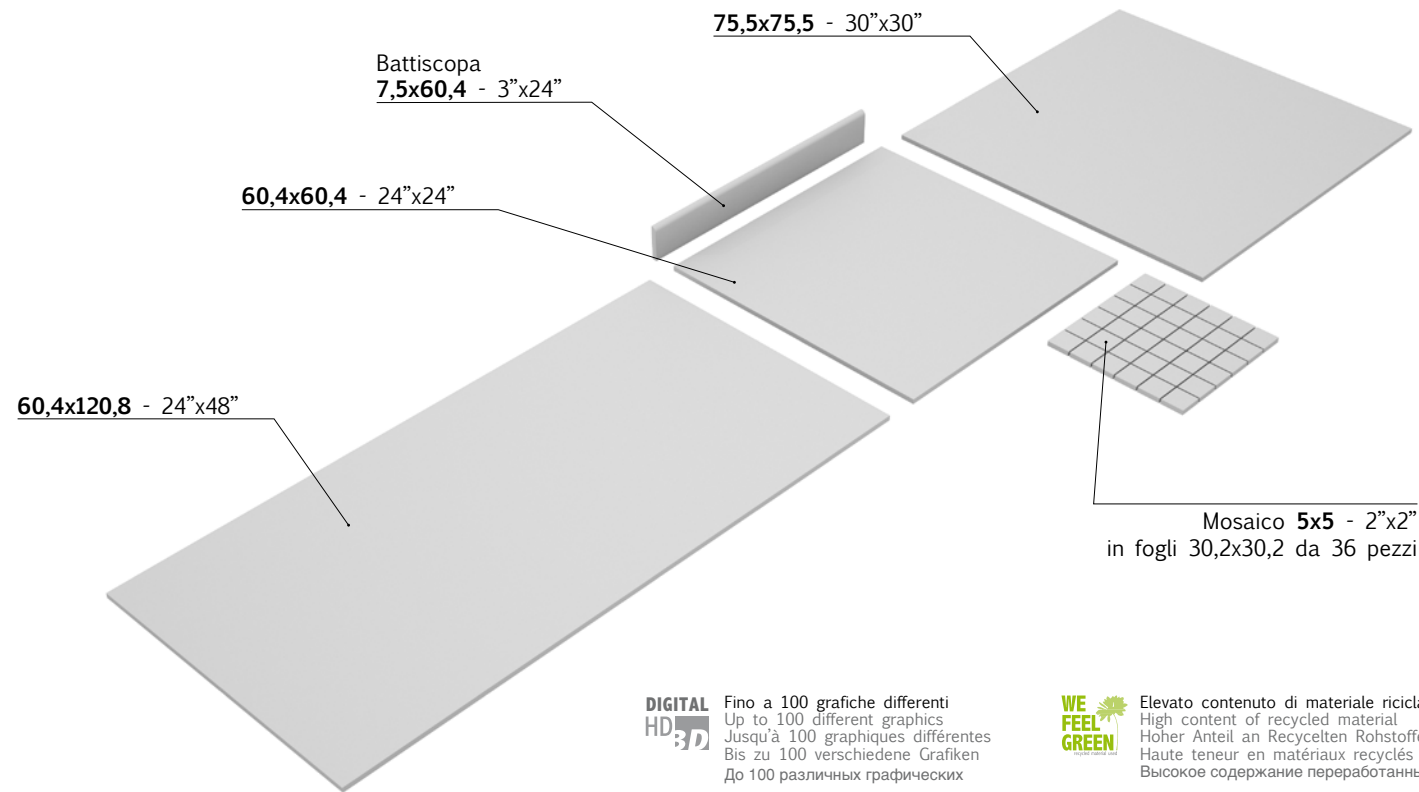

DIGITAL HD 3D Fino a 100 grafiche differenti
Up to 100 different graphics
Jusqu'à 100 graphiques différentes
Bis zu 100 verschiedene Grafiken
До 100 различных графических

WE FEEL GREEN Elevato contenuto di materiale riciclato
High content of recycled material
Hoher Anteil an Recycelten Rohstoffen
Haute teneur en matériaux recyclés
Высокое содержание переработанных материалов

SERIE SERIES - SERIE SERIE - СЕРИИ	RESISTENZA AGLI AGENTI CHIMICI ISO 10545-13	RESISTENZA ALL'ABRASIONE SUPERFICIALE (PEI) ISO 10545-7	COEFFICIENTE DI ATTRITO METODO B.C.R.A. D.M. 14/06/89 n° 236 par. 8.2.2	CARATTERISTICA ANTISDRUCCIOLO METODO DIN 51130	CARATTERISTICA ANTISDRUCCIOLO SU BAGNATO METODO DIN 51097	DCOF AcuTest SM ANSI A137.1
COTTOCEMENTO	CLASSE GLA	Light Grey, Beige CLASSE 4 (6000 giri) Dark Grey, Brown CLASSE 4 (2100 giri)	DRY: > 0,40 WET: > 0,40	ESTERNO R11 NATURALE R10	ESTERNO A+B	NATURALE WET: 0.73

COTTOCEMENTO / gres GL

Naturale/Rettificato

Unpolished/Rectified - Matt/Rektifiziert

Naturel/Rectifié - Naturalный/Ректифицированный

60,4x120,8 - 24"x48"

CE623R Light Grey
CE622R Beige
CE627R Dark Grey
CE628R Brown

75,5x75,5 - 30"x30"

CE753R Light Grey
CE752R Beige
CE757R Dark Grey
CE758R Brown

60,4x60,4 - 24"x24"

CE603R Light Grey
CE602R Beige
CE607R Dark Grey
CE608R Brown

Esterno/Rettificato

Outdoor/Rectified - Aussenbereich/Rektifiziert

Exterieur/Rectifié - Внешний/Ректифицированный

60,4x60,4 - 24"x24"


CE603ER Light Grey
CE602ER Beige
CE607ER Dark Grey
CE608ER Brown

7,5x60 - 3"x24"



Battiscopa - Bullnose
Sockel - Plinthe - Плинтус

MOSAICO 5x5 - 2"x2"



In fogli 30,2x30,2 da 36 pezzi.
In 30,2x30,2 - 12"x12" sheets made up of 36 pieces.
Sur feuille tramee de 30,2x30,2 de 36 pièces.
Sur feuille tramee de 30,2x30,2 de 36 pièces.
В листах 30,2x30,2, состоящих из 36 фрагмента.

CEB603R Light Grey
CEB602R Beige
CEB607R Dark Grey
CEB608R Brown

CE3MS5R Light Grey
CE2MS5R Beige
CE7MS5R Dark Grey
CE8MS5R Brown



Light Grey 60,4x60,4 - 24"x24"
Esterno/Rettificato

	CARATTERISTICA TECNICA TECHNICAL FEATURE TECHNISCHE EIGENSCHAFT CARACTERISTIQUE TECHNIQUE ТЕХНИЧЕСКАЯ ХАРАКТЕРИСТИКА	METODO DI PROVA TEST METHOD PRÜFUNGSMETHODE METHODE D'ESSAI МЕТОД ИСПЫТАНИЯ	REQUISITO NORMA REQUIRED STANDARDS NORMVORGABE VALEUR PRESCRITE SELON LA NORME ТРЕБОВАНИЯ НОРМЫ
	Dimensioni e Aspetto Sizes and look of the tile Abmessungen und Aussehen der Fliese Dimensions et Aspect du carreau Размеры и внешний вид	ISO 10545-2	Lunghezza e larghezza/Length and width/Länge und Breite/Longueur et largeur/Длина и ширина Spessore/Thickness/Stärke/Epaisseur/Толщина Rettilinearità spigoli/Straightness of sides/Kantengeradheit/Rectitude des arêtes/Линейность кромок Ortogonalità/Rectangularity/Rechtwinkligkeit/Angularité/Правильность формы Planarità/Surface flatness/Ebenheit/Planéité/Плоскость Qualità della superficie: il 95% delle piastrelle esenti da difetti Surface quality: 95% of tiles with no defaults Qualitätsanforderungen für die Oberfläche: 95% der Fliesen ohne Schaden Qualité de la surface: 95% des carreaux sans défauts Качество поверхности: 95% плиток без брака
	Assorbimento d'acqua Water absorption - Wasseraufnahme Absorption d'eau - Водопоглощение	ISO 10545-3	$\leq 0,5\%$ (Massimo valore singolo - Maximum single value Maximaler Einzelwert - Valeur individuelle maximale Максимальное единичное значение 0,6%)
	Resistenza alla flessione media Average bending strength - Mittlere Biegefestigkeit Résistance à la flexion moyenne - Спротивление среднему изгибу	ISO 10545-4	$35 \text{ N/mm}^2 \text{ min.}$ (Valore singolo - Single value - Einzelwert Valeur individuelle - Единичное значение 32 N/mm ² min.)
	Sforzo di rottura Breaking strength - Bruchlast Force de rupture - Разрушающее усилие	ISO 10545-4	Spessore / Thickness / Stärke - Epaisseur / Толщина $\geq 7,5 \text{ mm: } 1300 \text{ N min.}$ $< 7,5 \text{ mm: } 700 \text{ N min.}$
	Resistenza all'abrasione superficiale Resistance to surface abrasion Oberflächenabriebfestigkeit Résistance à l'abrasion de surface Спротивляемость истиранию	ISO 10545-7	Riportare la classe di abrasione (PEI) e il numero di cicli superati State the PEI rate and covered cycles Abriebklasse PEI und Anzahl der erfolgreich durchgeführten Zyklen angeben Mentionner le classement PEI et le nombre de cycles dépassés Указать класс истирания PEI и количество пройденных циклов
	Resistenza al Cavillo - Cracking resistance Haarrißbeständigkeit - Résistance au tressailage Устойчивость к растрескиванию	ISO 10545-11	Richiesta - Required Notwendig - Requisite - Требуется
	Resistenza al gelo Frost resistance - Frostbeständigkeit Résistance au gel - Морозостойкость	ISO 10545-12	Richiesta - Required Notwendig - Requisite - Требуется
	Resistenza agli agenti chimici (Basse concentrazioni di acidi e alcali) Chemical resistance (Acid and alkali low concentrations) Beständigkeit gegen Chemikalien (Niedrige Konzentration von Säuren und Alkalien) Résistance à l'attaque chimique (Basses concentrations d'acides et d'alcali) Химическая устойчивость (к малым концентрациям кислот и щелочей)	ISO 10545-13	Secondo la classificazione indicata dal fabbricante According to the classification stated by the manufacturer Gemäß der vom Hersteller angegebenen Klassifikation Selon le classement fourni par le fabricant Указать класс химической устойчивости
	Resistenza agli agenti chimici (Uso domestico e additivi per piscina) Chemical resistance (Domestic use and swimming pool chemicals) Beständigkeit gegen Chemikalien (Gebrauch im Wohnbereich und Chemikalien für Schwimmbad) Résistance à l'attaque chimique (Usage domestique et additifs pour piscine) Химическая устойчивость (для использования в домашнем хозяйстве и бассейнах)	ISO 10545-13	GB min min. GB GB mind min GB GB мин
	Resistenza alle macchie Stain resistance - Flechkenunempfindlichkeit Résistance aux taches - Устойчивость к пятнам	ISO 10545-14	Classe 3 min. - min. Class 3 mind. Klasse 3 - Classe 3 min - Класс 3 мин